




LCW's WP-110015 AMPS Fullband Duplexer provides high transmit to receive selectivity while minimizing insertion loss. The unit is available with temperature compensation and weatherproofing as an option for use in more extreme environmental conditions.

STANDARD DESIGN FEATURES

Passbands Receive Transmit	824-849 MHz 869-894 MHz
Passband Insertion Loss	1.0 dB max
Passband Return Loss	18 dB min
Antenna to Transmit Rejection 824-849 MHz	75 dB min
Antenna to Receive Rejection 869-894 MHz	75 dB min
Rx – Tx Isolation	75 dB min
Power Handling CW Peak	200 Watts 1000 Watts
Third Order Intermod	110 dBm min with two +43 dBm tones
Operating Temperature	-20 to +70 deg C
Connectors	Low IM N or 7/16 DIN Female
Size*	10.75" x 11.25" x 2.72"

*Not including connectors

RECEIVE CHANNEL DATA

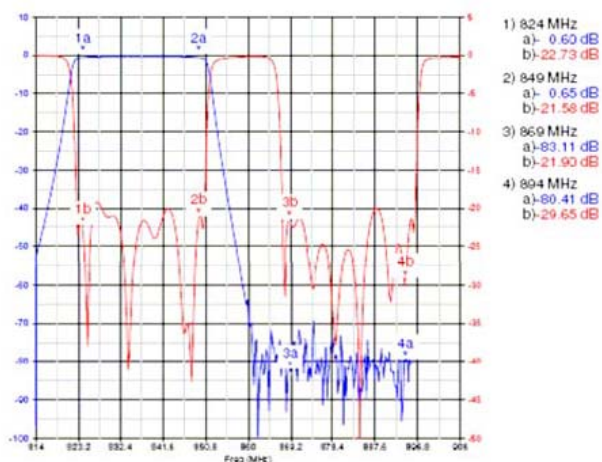

TRANSMIT CHANNEL DATA

